

Technical Data & Standard Equipment

Technical Data		1275	1275-24	3300	3300-24
Inner clamping range	inch	12 - 22	12 - 24	12 - 22	12 - 24
Outer clamping range	inch	10 - 20	10 - 24	10 - 20	10 - 24
Tyre width	inch	3 - 13	3 - 13	3 - 13	3 - 13
Max. wheel diameter	mm	1000	1000	1000	1000
Bead breaking range	mm	70 - 340	70 - 340	40 - 340	40 - 340
Compressed air supply	bar	8 - 10	8 - 10	8 - 10	8 - 10
Turntable speed	rpm	7.5	7.5	7.5	7.5
Space requirement (L x W x H)	mm	1040x1040x1690	1040x1040x1690	1040x1550x1740	1040x1550x1740
Weight	kg	187	187	220	220
Power Supply*		415V, 3PH, 50/60 Hz; 230V, 1PH, 50/60 Hz *Special voltage available on request			

Standard Equipment	1275	1275-24	3300	3300-24
Tyre lever	•	•	•	•
Servicing unit with pressure relief valve and oiler	•	•	•	•
Manual inflator with holder	•	•	•	•
Plastic protector for mounting head	•	•	•	•
Holder for tyre lubricant container	•	•	•	•
Plastic protector for clamping jaws			•	•
Plastic rim protector			•	•

monty[®] Tyre Changers



SINGAPORE
Snap-on Tools Singapore Pte. Ltd.
25 Tagore Lane, #01-02,
Singapore 787602
Tel: (65-21) 8370-9611 • Fax: (65) 6451-5574

INDONESIA
Snap-on Tools Singapore Pte. Ltd. - Indonesia Rep. Office
Graham Pratama Building, 20th Floor
Jl. M.T. Haryono Kav 15, Jakarta 12810, Indonesia
Tel: (62-21) 8370-9611 • Fax: (62-21) 8370-9612

MALAYSIA
Snap-on Tools Singapore Pte. Ltd. - Malaysia Branch
Unit A-2-3, Block A, 3-2, Jaya One
No. 72A, Jalan Universiti
46200 P.J., Selangor, Malaysia
Tel: (603) 7957-3088 • Fax: (603) 7958-2088

PHILIPPINES
Snap-on Tools Singapore Pte. Ltd. - Philippines Branch
4/F, 2053 Building, Edison Street, San Isidro
Makati City, 1234 Philippines
Tel: (63-2) 843-7935 • Fax: (63-2) 843-7730

TAIWAN
Snap-on Tools Singapore Pte. Ltd. - Taiwan Branch
3F-4, No.9, Wuquan 1st Road, New Taipei Industrial Park
Xinzhuang District 24892, New Taipei City, Taiwan ROC
Tel: (886-2) 2298-9789 • Fax: (886-2) 2298-2288

HONG KONG
Snap-on Tools Hong Kong Limited
Unit 2010, 20/F, Laford Centre, 838 Lai Chi Kok Road
Cheung Sha Wan, Kowloon, Hong Kong
Tel: (852) 2370-3700 • Fax: (852) 2370-3400

KOREA
Snap-on Tools Korea
#505 & 506, BuCheon Techno Park Block 3,
Building 301, 365 SamJung-Dong, OhJung-Gu
Bucheon City, GyeongGi-do, Korea 421-809
Tel: (82-32) 326-7310 • Fax: (82-32) 326-7312

THAILAND
Snap-on Tools (Thailand) Co. Ltd.
5th Floor, Talomsim Building, 924 Rama 3 Road
Bangpongpang Yannawa, Bangkok 10120, Thailand
Tel: (66) 2294-9660 • Fax: (66) 2294-9665

Authorized Reseller:




Part of the machine is illustrated with optional accessories at extra cost.
Technical modifications reserved Code: 2502.826H Rev 01/2013

NEW range
available for
24" rims

monty® 1275 tyre changer for small garages and service stations with low to medium tyre service volume.

- The strong and rugged design of all components ensures long life
- Outer clamping range of up to 20" and 24" capability
- Double acting bead breaker cylinder ensures gentle handling of rims
- Space saving as the mounting arm swing to the side so installation near the wall is possible
- The self-centering 4-jaw turntable controlled by 2 clamping cylinders ensures that the rim is always correctly clamped
- Alloy rims are handled particularly gently as mounting head is provided with plastic protectors. The one-part mounting head can be adjusted vertically and horizontally in spaced-apart position relative to the rim
- The bead breaker is provided with a large anti-skid rubber pad to preserve tyres and rims
- Pedals are ergonomically designed for the operator's comfort
- Quick-inflating valve

Flexible jaws for larger clamping range

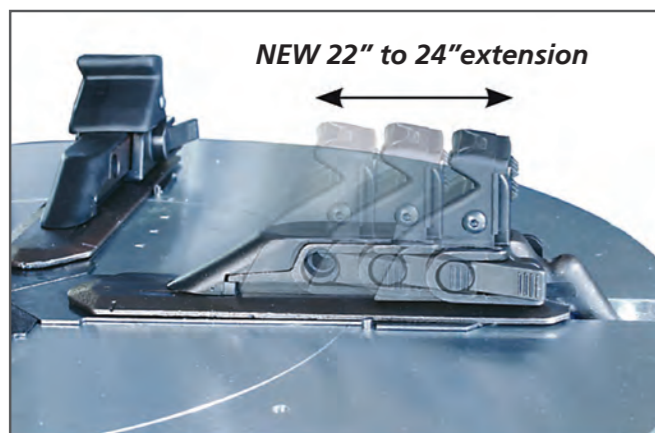

- Outer clamping range up to 24"
- Self-centering nylon-covered clamps grip securely and protect the wheel rim
- Reduced-angle jaws ensure no slippage
- Optional air inflation jets assist bead seating



Bead seating kit (EAA0345G49A)

- For bead seating and easy inflation of tyres
- Can be fitted on all monty tyre changers



monty® 3300 tyre changer is practical and powerful, designed for garages and tyre shops with medium tyre service volume

Additional features of monty® 3300

- For handling all conventional car tyres including PAX / CSR and other run-flat systems
- Withstand high forces, especially when handling wide and low profile tyres
- Optional retrofit of easymount pro handle wide tyres and when equipped with an accessory kit, it facilitates handling run-flat tyre systems e.g. PAX, CSR, RFT, eufori®, EMT and DSST
- Pneumatic tilt-back post and the 4 ergonomic pedals stand for user-friendly operation
- Exact pneumatic locking of post in working position

Plastic bead breaker disc (EAA0328G91A)

is a useful accessory to prevent any damage to the rim (OPTIONAL)



OPTIONAL ACCESSORIES

CARS

EAA0247G11A	Universal bead clamp for alloy rims
EAA0304G48A	Bead pressing tool
EAA0329G39A	ALU tyre lever
EAA0304G20A EAA0304G22A for 24"	Plastic caps for clamping jaws
EAA0304G14A	WAVE tyre lever
EAA0247G04A	Plastic protector
EAA0304G52A	Plastic rim protector
EAA0247G20A	Plastic mounting head

MOTORCYCLES

EAA0332G35A	Mounting head assembly
EAA0329G74A	Slip-on shoe for bead breaking
EAA0332G84A	Additional clamping jaws, range 8-15"
EAA0351G92A	Additional clamping jaws, range 12-23"
EAA0247G14A	Additional bead breaker blade

easymount pro / easymount pro swing (OPTIONAL)

The practical pneumatic mounting tool. An optimum complement to tyre changer

- Professional tool for tyre changing
- Extremely rugged and indispensable accessory for mounting and demounting tyres especially for low profile tyres and run flat tyre systems



- Pneumatically operated roller directly on the mounting head retains the bead in the desired position
- The tyre bead is pressed into the drop centre of the rim by means of a roller so that the mounting head can be positioned on the rim both easily and gently